


## LOPU-A4RH

### 48V/15A, AC/DC Power

#### Product Features:

- International Safety Approvals
- IP65 design for indoor or outdoor installation
- Cooling by free air convection
- High efficiency & reliability

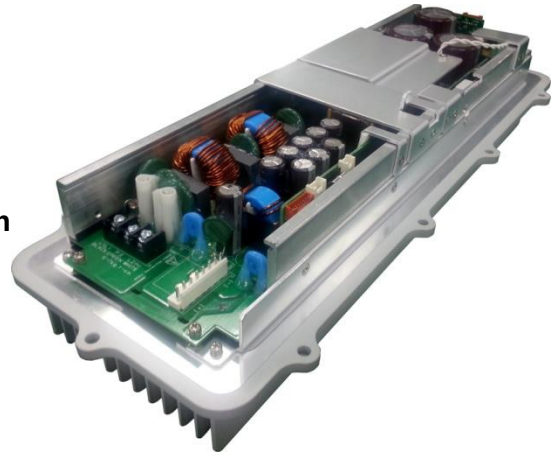

## GENERAL SPECIFICATIONS

### INPUT

- Voltage..... 100Vac
- Range..... 85 ~ 132 Vac
- Inrush ..... ≤ 40A
- Efficiency ..... ≥ Typically 91%

### OUTPUT

- Voltage..... Default 48.0VDC
- Current..... 15Amax
- Ripple & Noise ..... ≤ 500mVp-p
- Line Regulation ..... ≤ ± 1%
- Load Regulation ..... ≤ ± 3%

## PROTECTION & FUNCTION

- Output Over Voltage (Auto Reset)
- Output Current Limit (Auto recovery)
- Output Short Circuit (Auto recovery)
- Thermal (Auto recovery)
- Hold Up –Time(20mS)
- Dynamic regulation (±3%)

## PHYSICAL DIMENSIONS(W×D×H)

- 441×163 ×99(mm) (Except Cover)

## ENVIRONMENT

### OPERATION

- Temperature..... -30°C ~ +50 °C (Full Power)
- Relative Humidity..... 5% ~ 95%

### NON-OPERATION

- Ambient Temperature..... -40°C ~ +85 °C
- Relative Humidity..... 5% ~ 95%(non-condensing)

## AGENCY COMPLIANCES

- VCCI Class-B
- IEC 61000 4-5
- IEC 60950-1/ IEC 60950-22

